
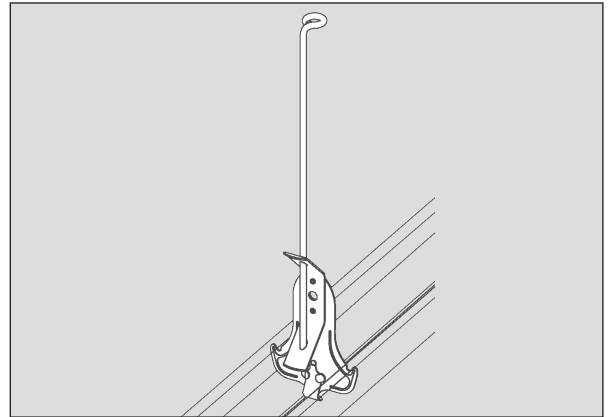


Eyelet wire, various lengths

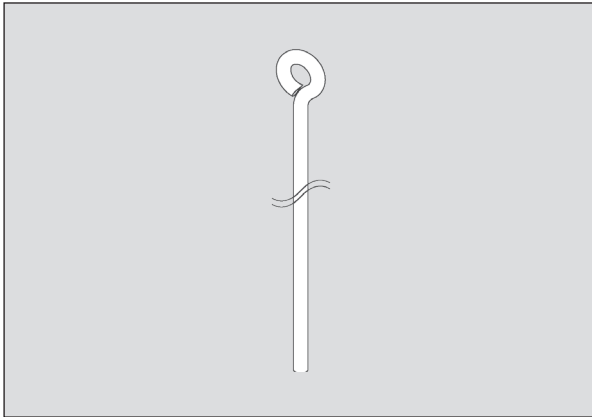

Application

Connecting wiring between mounting on structural soffit and a suspended bracket with tension spring; diameter 4 mm, galvanised

Characteristics

- Available in the following lengths (custom lengths on request):
 - 125 mm Item no. 100931; 300 PU / pallet
 - 250 mm Item no. 100932; 200 PU / pallet
 - 375 mm Item no. 100933; 150 PU / pallet
 - 500 mm Item no. 100934; 100 PU / pallet
 - 750 mm Item no. 100935; 100 PU / pallet
 - 1,000 mm Item no. 100936; 100 PU / pallet
 - 1,250 mm Item no. 100937; 100 PU / pallet
 - 1,500 mm Item no. 100938; 100 PU / pallet
 - 1,750 mm Item no. 100939; 50 PU / pallet
 - 2,000 mm Item no. 100940; 50 PU / pallet
 - 2,500 mm Item no. 100941; 50 PU / pallet
 - 3,000 mm Item no. 100942; 50 PU / pallet

Technical data

Material	Zinc-plated sheet steel	Packing unit	100 pcs. / PU
Material thickness	4.0 mm	Fire behaviour	Class A1
Shelf life	Unlimited	Load-bearing capacity	-
Storage conditions	Store in a dry place protected against moisture and wetness	Corrosion protection	Class B

(Relevant test certificates / declarations of performance can be requested, if necessary)

Notes

- Suitable for use in damp rooms only if provided with special anti-corrosive coating (on request)
- Not suitable for outdoor installation