



Framework

Product Data Sheet 211

Technical Information

Direct suspended bracket, 200 mm, CD 60/27

Item no. 101606

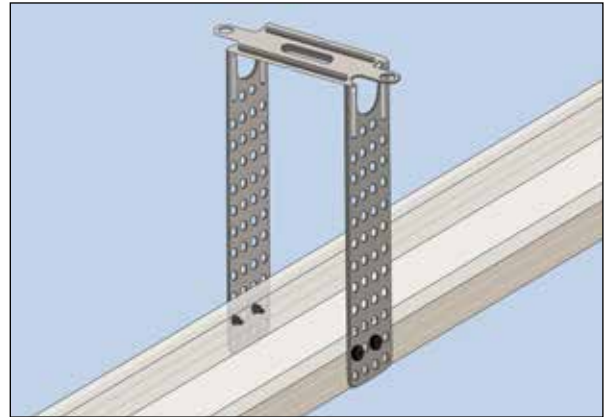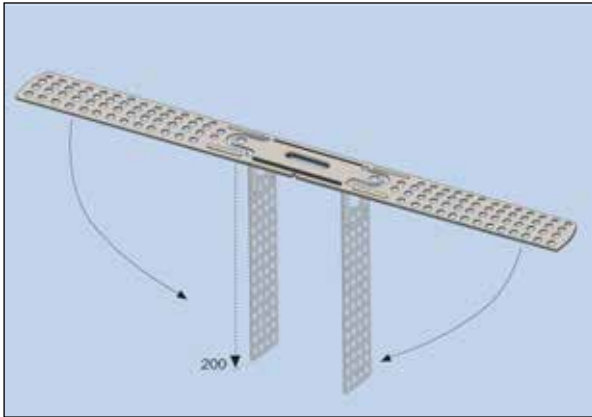

Application

Mounting of CD 60/27 profiles directly to the structural subbase, e.g. joists or concrete soffits, with the option of compensating up to 200 mm

Characteristics

- The two lateral straps also allow the bracket to be screwed down later.
- Flat design for compact handling on the jobsite.
- The limbs are cambered to provide increased rigidity.

Technical data

Material	Zinc-plated sheet steel	Packing unit	100 pcs. / PU; 72 PU / pallet
Material thickness	0.9 mm	Fire behaviour	Class A1
Shelf life	Unlimited	Load-bearing capacity	400 N (normal load)
Storage conditions	Store in a dry place protected against moisture and wetness	Corrosion protection	Class B

(Relevant test certificates / declarations of performance can be requested, if necessary)

Notes

- Suitable for use in damp rooms only if provided with special anti-corrosive coating (on request)
- Not suitable for outdoor installation